

## Two Component, Tough, Non-combustible, Resilient, Rapid Curing Spray Lining

### DESCRIPTION

**SilCrete™ TSL** is a unique new generation Thin Skin Lining (TSL) designed specifically for the consolidation of stressed rock structures associated with mining to prevent unravelling of strata and the associated risks presented from falling ground. It also has potential for use as a fire retardant coating for various substrates. It is a two component hard, tough, resilient material that is applied through low pressure plural component machinery with a static mixer. No heat is required. The product is flexible with good elongation and high early compressive and tensile strengths. Adhesion is outstanding to even moist surfaces. 60 to 70% of the physical properties are achieved in 1-2 hours (depending on ambient temperature) although set up time is only 10-15 minutes.

### FEATURES

- **High tensile strength**-capable of holding together under extreme loading conditions
- **High impact strength**
- **Compressive strength** approximately 10 MPa after 30 minutes
- **Outstanding adhesion**-bonds to all (rock, coal, concrete) surfaces
- **Fire Resistant**
- **Approved** for use in underground coal mines
- **Cream colour** for good light reflectance
- **Water based:** clean up with water, no flammable volatiles
- **No dust**
- **No raw material handling** -no requirement to be handled other than connecting hoses to the material containers, drums or 1000 litre IBC's.
- **No batch mixing** -no cement or aggregates or polymer additives required.
- **Applied at 5-10 mm thickness.**
- **Can be applied by hand gun or robotic spray apparatus.**

### TYPICAL APPLICATIONS

- **Rock support in tunnels and mines**
- **Suitable for lateral work and in shafts**
- **Slope stabilisation**
- **Grouting applications**
- **Soil stabilisation in poor ground conditions**
- **Consolidation**
- **Mesh replacement**
- **Ground support for areas with difficult access**
- **Assists with hard rock strain bursting**
- **Pillars/rib support.**
- **Rehabilitation of collapsed areas**
- **Long wall installation and recovery**
- **Portal construction**
- **Protection from weathering**
- **Ventilation stoppings**
- **Ventilation improvement by reduced surface friction**
- **Sealing against goaf ventilation to avoid spontaneous combustion.**

POLYMER GROUP LIMITED

**SilCrete TSL**

Urea—Silicate Spray Thin Skin Liner


# Silcrete TSL

COMPONENTS	Part A	Part B
Appearance	White, hazy liquid	Brown, translucent liquid
Viscosity at 23°C	600-900cP	500-600cP
Specific gravity at 23°C	1.50	1.16
Mix ratio	1A:1B by volume	

**TECHNICAL DATA:** Please note that the figures below are from typical laboratory testing. Actual mine conditions may influence these results.

## PERFORMANCE AND CURED PROPERTIES DATA


Curing time to put into service	1-2 hours
Compressive Strength	10 MPa after 30 minutes 35 MPa after 5 days
Tensile Strength	7.8 MPa
Elongation	5-10%
Thermal Conductivity (ASTM C518-2010)	0.1823 W/m.K

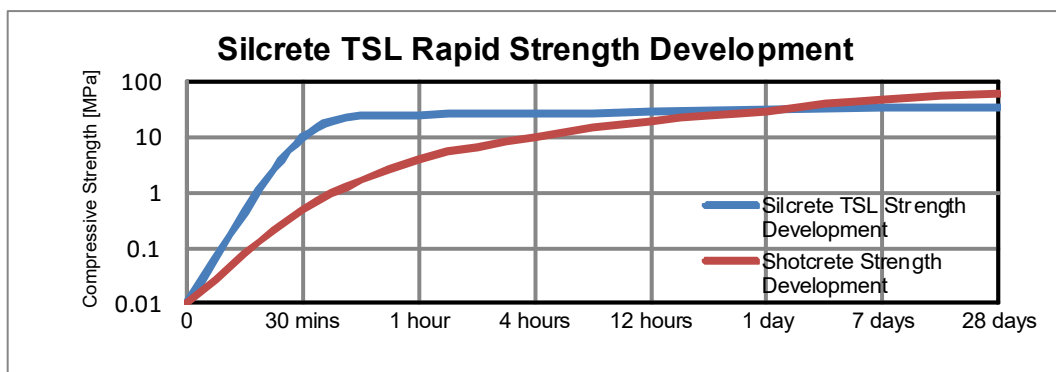


Adhesion testing showing substrate failure

# Silcrete TSL


Physical Properties	Test Method	Silcrete TSL
Uniaxial Compressive Strength (MPa)	ASTM D7012	36.2
Point Load Strength Index (MPa)	ASTM D5731	4.2
Direct Tensile Strength (MPa)	ASTM D3967	7.8
Elastic modulus (MPa) (strain < 2.86%)	-	374.37
Elastic modulus (MPa) (strain ≥ 2.86%)	-	73.26
Elastic modulus (MPa) (strain < 2.0%)	-	512.62
Elastic modulus (MPa) (strain ≥ 2.0%)	-	117.42
Poisson's ratio (strain < 2.0%)	-	0.50
Poisson's ratio (strain ≥ 2.0%)	-	0.68
Fracture Toughness (MPa M <sup>1/2</sup> )	-	1.0
Punch Shear (kN)	ASTM D732	13.7
Adhesion (MPa)	ASTM D4541	> 3.7 (substrate failure)

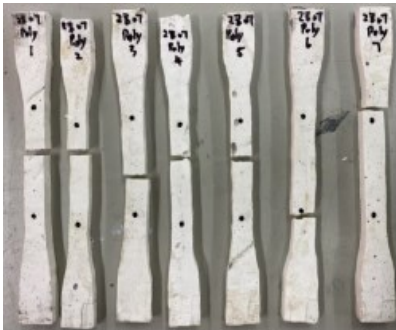

Dog-bone samples from tensile testing

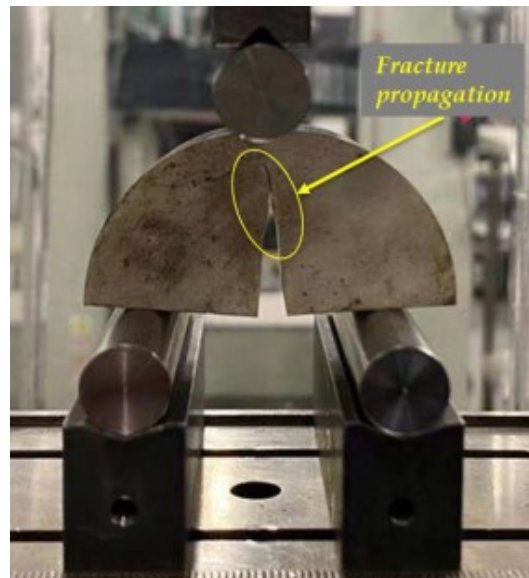

Fracture toughness test

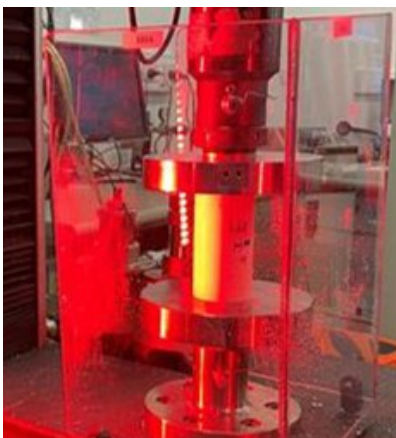


Uniaxial compressive strength testing

# Silcrete TSL

## BEND STRENGTH ON CONCRETE

Approximately 300% improvement with Silcrete TSL

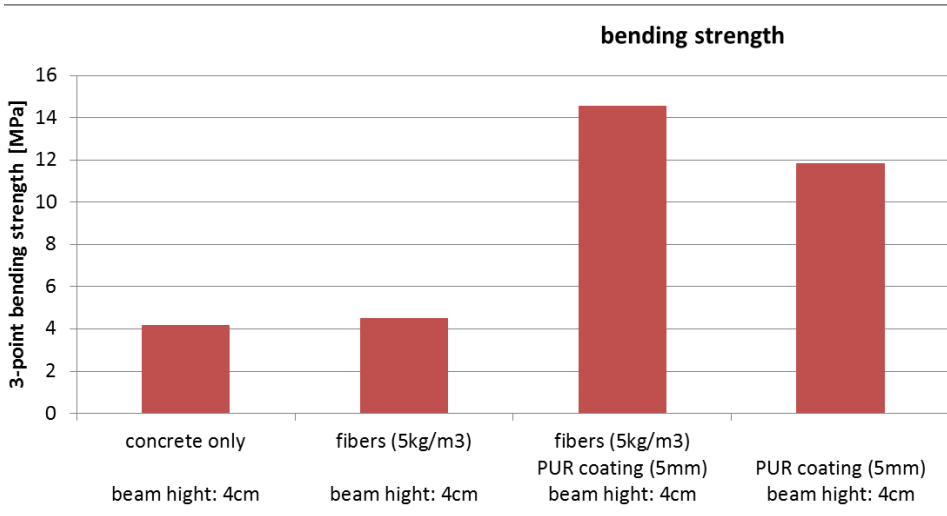

Without Silcrete TSL



With Silcrete TSL

## MSTC TESTING COMPLIANCE

Silcrete TSL has been tested by the Mine Safety Technology Centre (MSTC) and complies with the requirements of MDG3608.

TEST MDG3608	Method of Analysis	Complies
Maximum Exothermic Temperature	Appendix D1	✓
Electrical Resistance	Appendix D2	✓
Fire Resistance	Appendix D3	✓
Fire Propagation	Appendix D4	✓
Flashpoint	Appendix D5	✓
Oxygen Index	Appendix D6	✓
Chemical Characterisation of Components	Appendix D7	✓

# Silcrete TSL

---

## SAFETY AND HANDLING

**Silcrete TSL Part A** is considered practically non-toxic, the usual precaution for handling chemicals should be exercised. Protective clothing should be worn and contact with the body avoided.

**Silcrete TSL Part B** should be treated as a diisocyanate and the usual precautions should be exercised when handling this family of chemicals. Protective clothing should be worn and contact with the body avoided. Inhalation of spray aerosol must be strictly avoided and a protective mask, preferably with a clean air supply should be worn in the immediate spraying area.

## STORAGE AND STABILITY

**Silcrete TSL Part A** storage life of 12 months from date of manufacture when stored at in-door ambient conditions (15-35°C) in unopened containers.

**Silcrete TSL Part B** is a diphenylmethane diisocyanate and will react with moisture generating carbon dioxide. The containers should be stored with the seals intact and opened containers used first. The reaction with moisture/water can lead to dangerous build-up of pressure in the drums. Therefore, partially used containers must be tightly re-sealed after use to prevent ingress of moisture. Do not reseal containers once the contents have been used. Storage life of 12 months from date of manufacture when stored at in-door ambient conditions (15-35°C) in unopened containers. It is strongly advised to purge with dry nitrogen during use.

## PROCESSING AND INSTRUCTIONS FOR USE

**These materials must be handled and applied only by trained operators.**

**Silcrete TSL** is applied through a suitable plural component pump system direct to the rock face either by hand gun or robotic arm application. For hand spray application, we recommend application equipment such as; SK90, PG30/40 pneumatic gear pumps, hydraulic gear pumps or double action piston pumps such as Graco Reactor 2 E-XP2 or Reactor H-XP3. A continuous positive pressure, surge free delivery is required for best results.

The part A component requires thorough mixing and recirculation prior to use. We recommend the use of continuous agitation of the Part A component during application.

It is essential to concentrate the sprayed material into all cracks and fissures to “lock up” loose strata.

The material is thixotropic as it leaves the spray head which eliminates drainage and sagging and ensures the material stays where sprayed into cracks etc. The material is set up and tack free in 10-20 minutes depending on ambient temperature.

The liner can be drilled through and if required rock bolts installed after 60 minutes.

For applications where extreme temperature conditions make application difficult, the reactivity can be adjusted to suit these conditions. Consult RMP technical team for advice.

# Silcrete TSL

**POLYMER GROUP LIMITED  
REZOLUTION MINING POLYMERS**

62 Stonedon Drive  
East Tamaki 2013  
PO Box 204 106  
Highbrook 2161  
East Tamaki

Phone: +64 9 274 1400  
Fax: +64 9 274 1405  
email: sales@polymer.co.nz  
www.polymer.co.nz

*Excellence in Subterranean  
Chemistry*



## Application Coverage Rates:

Dry Film Thickness	Litres/Sq metre
6mm	6.0L/m <sup>2</sup>
8mm	8.0L/m <sup>2</sup>
10mm	10.0L/m <sup>2</sup>

## PACKAGING

PACKAGING	A	B
20L Pails	30kg	23kg
60L Drums	90kg	70kg
200L Drums	300kg	232kg
1000L IBC	1500kg	1160kg

20 litre pails, 60 and 200 litre drums, and 1,000 litre IBC's.

## REZOLUTION MINING POLYMERS

ReZolution Mining Polymers, a division of Polymer Group Ltd was established in 2013 with the goal of developing a high-performance range of mining industry strata reinforcing and strata control materials.

The technical group associated with ReZolution Mining Polymers comprises research and development chemists, experienced mining industry personnel, together with construction industry applicators.

Polymer Group Ltd is seeking world-wide representation through regional distributors who are experienced in supply to construction (tunneling and related infrastructure activities), mining material suppliers and geothermal/ground control professionals and contractors.

To the best of our knowledge the technical data contained herein is true and accurate at the date of issuance and is subject to change without prior notice. User must contact Polymer Group Ltd to verify correctness before specifying or ordering. No guarantee of accuracy is given or implied. Polymer Group Ltd guarantee our products to conform to our quality control test specifications. We assume no responsibility for coverage, performance or injuries resulting from use. The User of Polymer Group Ltd.'s products must be suitably trained and competent. The use of any of Polymer Group's ReZolution Mining Products for any purpose or application must be assessed and authorized in every instance by qualified geotechnical engineers and the Polymer Group Ltd makes no claims as to fitness for purpose or otherwise for any particular application, process or procedure. Liability, if any, is limited to replacement of products. Prices and cost data if shown, are subject to change without prior notice. NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY THE SELLER, EXPRESS OR IMPLIED, STATUTORY, BY OPERATION OR LAW, OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.