

ENDURATHANE IN4M SLAB LIFTING FOAM

MACHINE INJECTION FOAM SYSTEM

DESCRIPTION:

ENDURATHANE IN4M SLAB LIFTING FOAM is a highly energy efficient, concrete slab lifting and void filling foam for machine application.

ENDURATHANE IN4M SLAB LIFTING FOAM is formulated with HFC as the blowing agent which has zero ozone depleting potential.

PHYSICAL PROPERTIES:

Component A (isocyanate)

Viscosity (20°C) 230 cps
Flashpoint (ASTM D92) 230°C
Specific Gravity 1.24

Component B (polyol)

Viscosity (20°C) 550cps
Specific Gravity 1.10

Reaction Profile:

Cream Time (20°C) 20 secs
Gel Time 47 secs
Rise Time 80 secs

Mix Ratio: 100A:100B parts by volume

TYPICAL CURED PROPERTIES

Density 64 kg/m³
Thermal Conductivity 0.025 W/mK
Closed cells 90 – 95%
Dimensional Stability
24 hrs @ 100°C 1 to 5%
24 hrs @ -40°C 0%
24 hrs @ 70°C/100% RH 0 to 5%
Water Absorption (23°C/kg/m²) 0.49
Water Vapour Permeability 1.8
(Perm-in ASTM C-355 @ 23°C)
Compressive Strength 650 kPa
(@ 10% deformation)
Compressive Strength 800 kPa @ 85 kg/m³
(@ 10% deformation)
Loading bearing @ 85 kg/m³ 60 - 65 ton/m²

Theoretical Usage 1 kg of expanded foam occupies 0.012m³ at an installed density of 85 kg/m³. Make adequate allowance for losses.

RECOMMENDED USES:

Applications include:-

- Concrete slab lifting
- Void filling

ENDURATHANE IN4M SLAB LIFTING FOAM is halide ion free, has a low thermal conductivity and permeability, good mechanical strength, is chemically resistant and has good dimensional stability.

Endurathane IN4-SL is not fire retarded. All polyurethane foam is combustible and when exposed must be protected with an appropriate thermal barrier, equal in resistance to 13mm gypsum board.



HEALTH AND SAFETY ADVICE

Refer to Polymer Group Safety Data Sheets for individual products. Also refer to technical Information PU193-IE "MDI-Based Compositions: Hazards and Safe handling Procedures".

Component A [isocyanate] contains methylene bisphenyl di-isocyanate [MDI]. It is moderately toxic. **Avoid contact with skin or eyes, avoid breathing vapour** and use only in well ventilated areas.

Component B [polyol] contains HFC volatile blowing agent. It is a mild irritant. In confined spaces it may displace sufficient air to be hazardous. Provide ventilation or use only in well ventilated situations.

Always wear **eye protection** and suitable **protective clothing**. **Flush splashes to the skin or eyes with copious quantities of water.**

PACKAGING



Endurathane Part A or **Suprasec 5005** nett 250 kg per 200 litre drum.
ENDURATHANE IN4M Part B nett 210 kg per 200 litre drum.



APPLICATION DATA

ENDURATHANE IN4M SLAB LIFTING FOAM can be hand mixed (see separate application bulletin) or machine-applied through 2-component polyurethane application equipment such as **Graco Reactor** with **Probler P2** or similar. Please consult your representative for advice regarding any equipment application questions you may have.

Equipment: **Graco Reactor Probler**

Pre-heat: Part A [isocyanate]	35-45°C
Part B [polyol]	35-45°C
Hose Temperature:	40-50°C

Optimum temperatures will vary with equipment, substrate temperature and ambient conditions generally.

Check and maintain correct output ratio to $\pm 2\%$. Ensure metering is accurate by regular ratio checks and monitoring of line pressures to gun.

Operator must have adequate product knowledge to recognise faulty foam so remedial action can be taken.

Substrates:

Endurathane IN4M SLAB LIFTING FOAM may be applied to most surfaces. Substrates must be clean and dry.

Ambient and surface temperatures should be above 15°C. **Low temperatures will decrease yield markedly.**

Theoretical Coverage:

Always check yield and application rates at start of job and then regularly to ensure product usage is as expected. **Adequate allowance must be made for over-packing, especially when cavities are narrow or foam has a long flow path*.**

OPTIMUM FOAM YIELD* on a 460 kg kit is 5.40m³ at an installed density of 85 kg/m³.



STORAGE AND HANDLING PRECAUTIONS

ALL CHEMICALS MUST BE USED BY TRAINED PERSONNEL.

Component A [isocyanate] refer to *Endurathane Part A / Suprasec 5005 data sheet for safety and handling requirements.*

Component B [polyol] contains HFC which has a boiling point of 15°C. Storage at elevated temperatures will result in build up within the drums, and for this reason the product should be stored away from direct sunlight.

When opening a container, care must be taken to release any internal pressure slowly.

To prevent loss of HFC by evaporation, and to prevent ingress of moisture, drums must be kept tightly sealed when not in use.

Clean up:

Owing to the chemical resistance of polyurethane products it is important to clean up any overspray as quickly as possible. Methyl Proxitol is suitable for general cleaning and methylene chloride can be used as a line flush.

Wear suitable protective clothing, goggles and gloves at all times when cleaning.

Greasing components beforehand assists with contamination removal.

Storage Stability

Recommended storage temperature is 10-25°C in tightly closed containers to prevent moisture and other contamination. Under these conditions this product has a storage stability of at least 6 months.

Store out of direct sunlight and sources of heat. If exposed to moisture Component A will crystallise resulting in line blockages.

Rev 3 Aug 2014

POLYMER GROUP LTD

PO Box 204 106 Highbrook, Auckland 2161, New Zealand

Telephone: 64-9-274 1400 Fax: 64-9-274 1405

Email: sales@polymer.co.nz www.polymer.co.nz



PROPERTIES AND SUSTAINABILITY OF POLYURETHANE FOAM

Polyurethane rigid foams have a closed cell structure and high cross-linking density give them the characteristics of good heat stability, high compressive strength and excellent insulation properties.

PU insulation has a very low thermal conductivity, starting from as low as 0.017 W/m.K, making it one of the most effective insulants available today for a wide range of applications.

All types of insulation can also play a role in improving the energy efficiency of buildings and reducing CO₂ emissions.

The environmental impact Polyurethane offers is as follows:

- Excellent thermal efficiency – leading to optimum energy savings and reduced CO₂ emissions.
- Relatively low environmental impact at the building level – the product saves more than 100 times the energy than is used in its manufacture.
- Durability – leading to long term performance and reducing the need for replacement, therefore saving energy.

The economic impact from polyurethane is:

- Increased energy efficiency – leading to immediate savings for the end user.

Ref: PU Europe Sustainability and polyurethane insulation.

Λ INFORMATION ON THERMAL CONDUCTIVITY (K-FACTORY OR λ) TESTING

To test the insulation properties of foam we test the thermal conductivity or K-factor, which is a measure of a materials ability to transfer heat through conduction and therefore is the principle property of an insulation material.

Typical values of insulating materials are:


Material	Density (kg/m ³)	k-factor (W/mK)
Polyurethane foam closed cell	32	0.019 initial 0.025 aged
Polyurethane foam open cell	10-12	0.035
Polystyrene foam	16	0.035
Rockwool	100	0.037
Glasswool	65-160	0.041
Timber – white pine	350-500	0.112

Insulation materials are then normally reported in terms of their R-value, which is a measure of the thermal resistance.

ENDURATHANE IN4M SLAB LIFTING FOAM

with the above k-factor result would give an estimated R-value of 2.00 m² K/W @ 50mm thickness.

The following graph shows the thickness of insulation materials needed to get an R-value of 7.5 m² K/W with standard PU foam. As seen, PU offers the best insulation at lowest thickness.

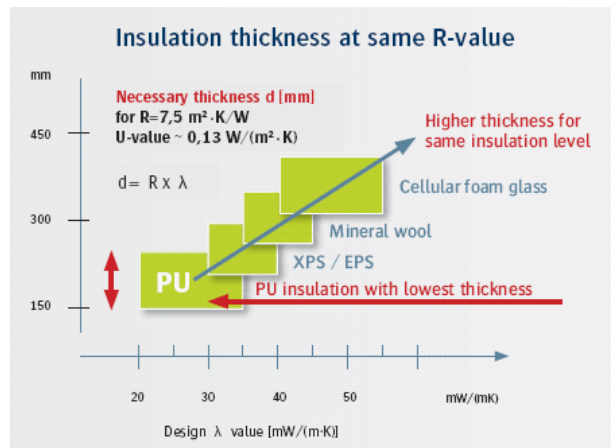

Reference: Insulation for sustainability: A guide, XCO2 Conisbee 2002